

# CONVEREX<sup>®</sup> BATTERY

# DEEP CYCLE



## DC12-15

### FEATURES&BENEFITS

- True deep cycle AGM-GEL technology-GREEN SOLUTION
- Over 99.99% virgin lead for grid plate
- Carbon active material
- Electrolyte + Gel for longer cycle life
- Heavy duty grid/paste design for deep cycle application
- Maintenance free, non-spillable, valve-regulated
- Double separator configuration :long cycle life &High energy density and super anti-vibration design
- Low self-discharge for longer shelf life



### ELECTRICAL SPECIFICATIONS

Voltage (V)	Capacity(Ah)					Reserve Capacity(min)		
	100HR	20HR	10HR	5HR	3HR	25A	56A	75A
12	/	15.0	14.4	13.5	13.0	/	/	/

### PHYSICAL SPECIFICATIONS

Dimensions(mm/inches)				Weight (kg/lbs)	Terminal Type (Standard)	Case Material
Length	Width	Height	Total Height			
151.5/5.96	99.5/3.92	97/3.82	100/3.94	4.00/8.82	T12-1(M5)	ABS

Operating Temperature Range		
Discharge	Charge	Storage
-15°C~50°C (5 F~122 F)	0°C~40°C (32 F~104 F)	-15°C~40°C (5 F~104 F)



IATF16949


ISO14001

ISO9001

# DC12-15

DEEP CYCLE AGM-GEL BATTERY

## DIMENSIONS

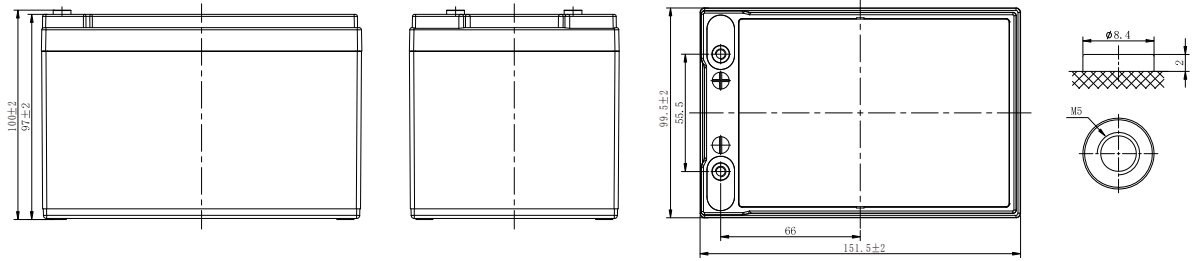


Terminal


Note: Terminal Torque Values in-lb(Nm):17.69-26.53(2.0-3.0)

## PERFORMANCE CHARACTERISTICS


Charging Profile

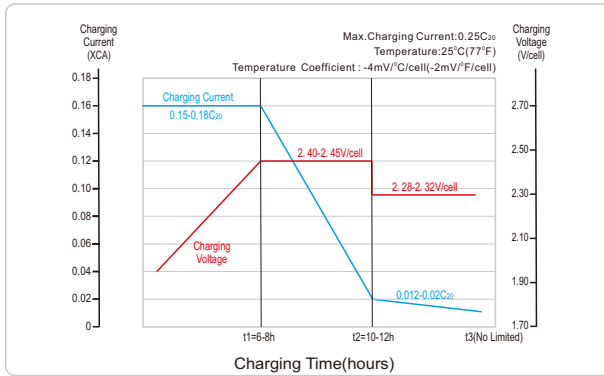


Relationship of OCV and State Of Charge(25°C,77°F)

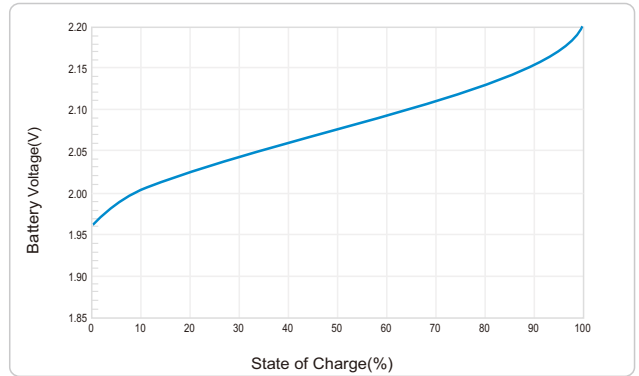

Cycle Life in Relation to Depth Of Discharge

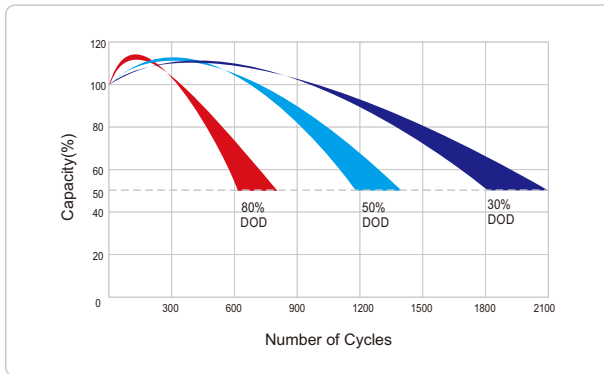

Self-discharge Characteristic

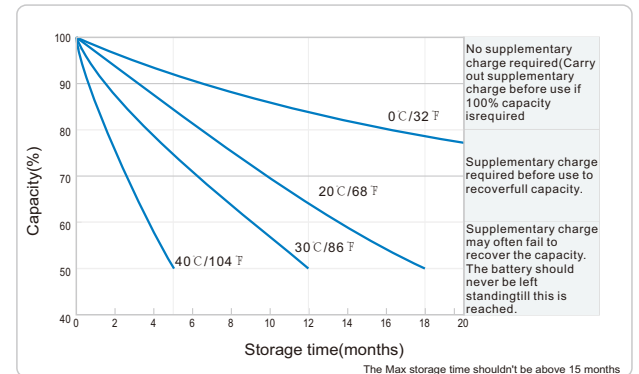

● UPS ELEKTRONIK TIC. A.S.  
 Ferhatpasa mah. 43. Sok. No:52-54 Atasehir  
 Istanbul  
 Tel:+90-216-4669550 (Pbx)  
 E-mail: info@riello-ups.com.tr  
 web: www.riello-ups.com.tr