


# XP SERIES-ULTRA HIGH RATE

## XP12-150 (12V150W)

# CONVEREX BATTERY

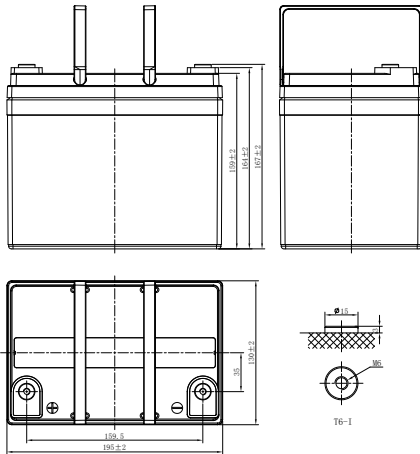

## CHARACTERISTICS

Item	Specifications	
Rated Voltage	12V	
Nominal Rate (25°C)	W <sub>15</sub> , 1.67V/cell	150W/cell
Nominal Capacity (25°C)	C <sub>20</sub> , 1.60V/cell	38Ah
Dimension	Length	195mm (7.68inches)
	Width	130mm (5.12inches)
	Container Height	164mm (6.46inches)
	Total Height	167mm (6.57inches)
Approx Weight	10.44kg (23.0lbs)	
Terminal	T6-I(M6)	
Container Material	ABS (UL94 HB or V-0 optional)	
Short-circuit current	980A	
Internal Resistance (25°C)	Approx 8 mΩ (Fully charged)	
Operating Temp. Range	Discharge	-15~50°C (5~122°F)
	Charge	-20~40°C (-4~104°F)
	Storage	-15~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max.Charging Current (25°C)	0.25C	
Charge voltage (25°C)	Standby Use	Equalization Use
	2.25-2.30V/cell	2.30-2.40V/cell
Temp. Coefficient	-3mV/cell/°C	
	40°C (104°F)	106%
Effect of temp. to Capacity	25°C (77°F)	100%
	0°C (32°F)	86%
	Self Discharge	≤3% per month at 25°C (77°F)

## DISCHARGE TABLE

Constant Current Discharge (Amperes) at 25°C (77°F)															
F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	132.5	89.8	69.7	57.2	42.1	30.8	24.4	13.5	9.53	7.50	6.23	5.31	3.93	3.26	1.72
1.80V/cell	142.5	95.1	73.2	59.5	43.4	31.6	25.0	13.7	9.69	7.61	6.32	5.39	4.03	3.35	1.75
1.75V/cell	150.2	99.0	75.6	61.2	44.5	32.3	25.5	14.0	9.85	7.71	6.40	5.45	4.11	3.41	1.79
1.70V/cell	157.3	102.9	78.1	62.9	45.7	33.0	26.0	14.2	9.99	7.82	6.49	5.52	4.20	3.48	1.82
1.67V/cell	162.7	105.8	80.0	64.2	46.5	33.6	26.4	14.4	10.1	7.89	6.55	5.57	4.31	3.54	1.85
1.60V/cell	172.6	110.3	82.8	66.1	47.7	34.4	26.9	14.6	10.3	8.03	6.65	5.65	4.40	3.62	1.90
Constant Power Discharge (Watts/cell) at 25°C (77°F)															
F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	250.7	170.8	133.5	110.2	81.4	59.7	47.4	26.4	18.7	14.8	12.3	10.5	8.05	6.71	3.55
1.80V/cell	267.0	179.8	139.2	114.0	83.6	61.1	48.4	26.8	19.0	15.0	12.5	10.7	8.22	6.85	3.59
1.75V/cell	278.3	185.7	143.0	116.5	85.3	62.2	49.2	27.2	19.3	15.2	12.6	10.8	8.33	6.94	3.66
1.70V/cell	288.6	191.8	146.8	119.3	87.1	63.4	50.0	27.6	19.5	15.3	12.8	10.9	8.45	7.03	3.70
1.67V/cell	296.1	196.1	150.0	121.5	88.4	64.2	50.7	27.8	19.7	15.5	12.9	11.0	8.62	7.12	3.75
1.60V/cell	308.1	201.9	154.1	124.5	90.4	65.4	51.6	28.3	20.0	15.7	13.0	11.1	8.73	7.21	3.81

# XP SERIES-ULTRA HIGH RATE XP12-150 (12V150W)

# CONVEREX BATTERY

## APPLICATIONS

- UPS
- Hospitals and Testing Laboratories
- Emergency Power Supply
- Electric starting
- Telecommunications
- Data Centers


## GENERAL FEATURES

- 12 years design life (25°C)
- Excellent high current performance - optimised for short discharge time
- Advanced AGM technology for superior high-rate power
- Long Life Alloy - minimizing grid growth, reducing gassing and extending battery life
- Epoxy-sealed posts eliminate leaks
- Optimal energy density - saves floor space


## STANDARDS

- Compliance with IEC 60896 standards
- Classified as "Long Life" according to Eurobat
- CE,UL Approved
- Manufactured in IATF 16949, ISO 45001,ISO 9001 and ISO 14001 certified production facilities


### Discharge Characteristics

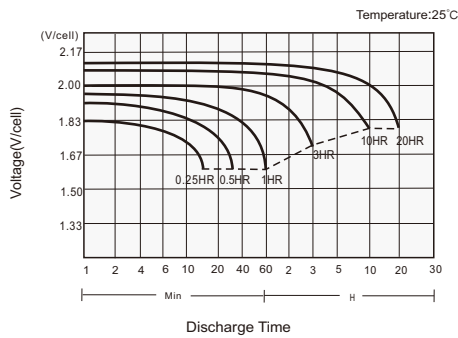


### Charging Characteristics

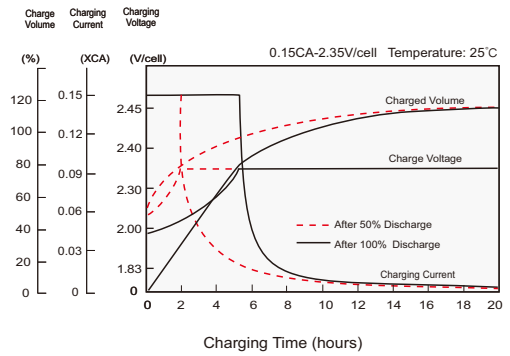

### Effects of Temperature on Capacity

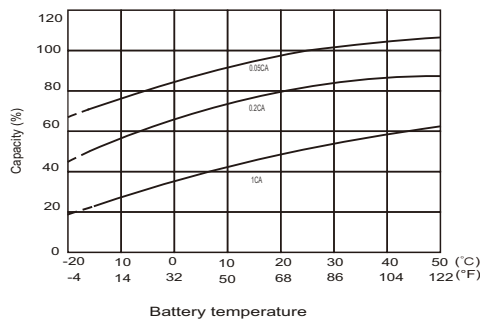

### Self Discharge Characteristics

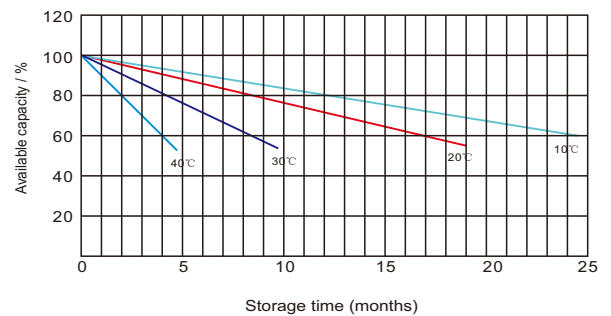

## UPS ELEKTRON K T C. A .

Ferhatpa a Mah 43. Sk No: 52-54 Ata ehir/ stanbul 34888 Türkiye  
 Tel: +90 216 466 95 50      Whatsapp: +90 532 318 02 06  
 www.upselektronik.com      www.riello-ups.com.tr